




DOLAV provides a new solution for heavy-duty hygienic pallets. The pallet is designed to perform under the most demanding circumstances and strict hygiene requirements.

The special design provides extra strength for all versions.


Technical Data

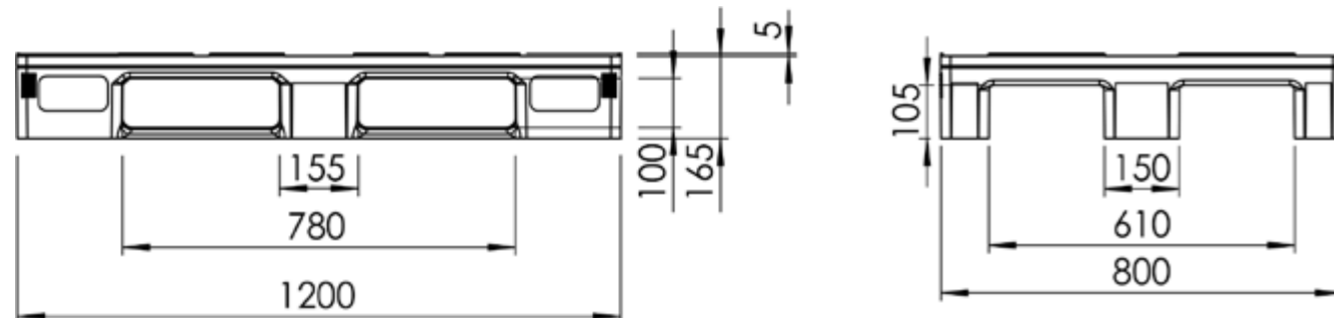

		Solid/Perforated Standard	Solid/Perforated Reinforced
Pallet with 3 runners	Weight** (kg)	17.80	20.80
	Static load (kg)	7500	7500
	Dynamic load (kg)	1800	1800
	Racking (kg)	800	1500
	Colour	Light grey/ Light blue	Solid - upper light grey+lower turquoise pastel Perforated - upper turquoise pastel +lower grey
Dimensions (mm)	1200 x 800 x 160		
Raw materials	HDPE		
Temperature range	-40°C up to 60°C (HDPE)		
Qty in container (Units)	Container 20'	Container 40'	Container 40HC
	253	506	572



THE PERFORATED HYGIENIC PALLET MH-800

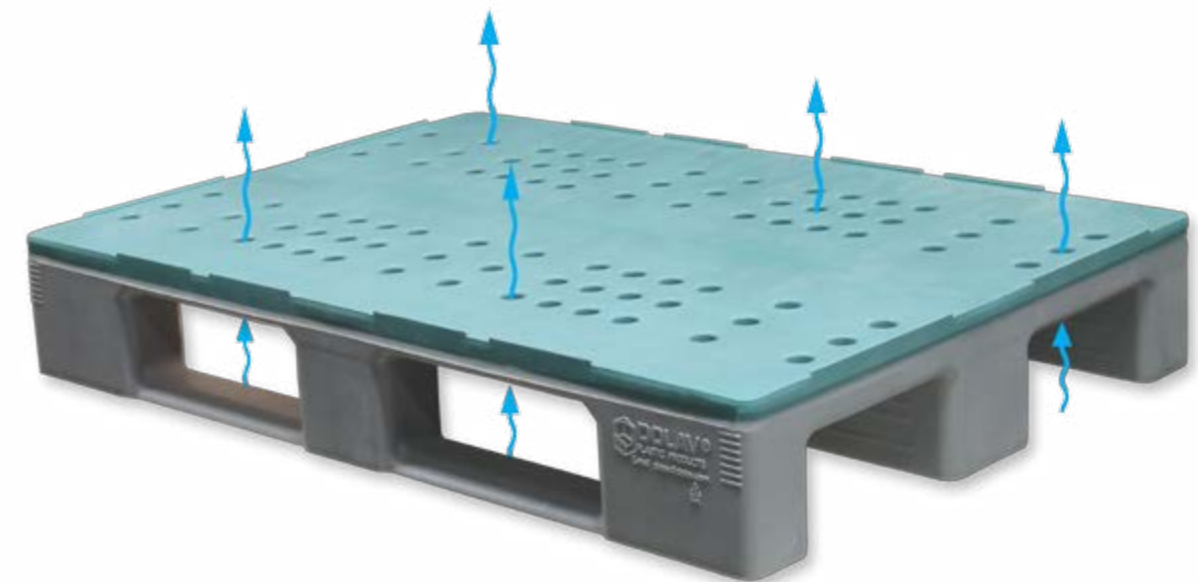

The Unique Heavy Duty Hygienic Pallet

- The best perforated hygienic pallet in the market
- Euro size (800X1200X160mm)
- More air flow through the upper deck
- Standard or reinforced racking version
- 2 Upper deck options
- 3 Integral hygienic runners
- Excellent racking performance
- HDPE structural foam technology with food grade materials
- Fully recyclable
- Long life span
- RFID compatible - fully protected
- Multi-version options allow you to select the best solution according to your specific requirements



Dolav Plastic products, Kibbutz Dvir M.P. HaNegev 8533000
Tel: 972-72-2450700, Fax: 972-8-9918710 Email: dolav@dolav.com Website: www.dolav.com



Worldwide offices: Belgium, China, Denmark, France, Germany, Ireland, Israel, Italy, Russia, Singapore, The Netherlands, UK, USA

Multi-Version Options

Upper Deck Options - Unique Perforation

The perforated pallet has a unique design which provides better air flow through the hygienic holes. Therefore, The MH-800 is also an excellent solution for **FAST COOLING** applications in the food industry.



Solid Upper Deck

We also offer the option for a solid upper deck.



Reinforced Racking Versions

This sturdy pallet is designed for heavy-duty hygienic use with reinforcements to suit up to 1500 KG, in **RACKING** systems.

This pallet's great performance makes it the perfect solution for many applications. Pallet static load up to 7500 KG.

Outer Safety Rim

3 Optional safety outer rims



5 mm

20 mm

no rim

Logo

Hot stamp or embossed logo - possible on 4 feet



RFID Compatible

RFID can be added Fully protected inside




Easy Packaging Design

Special design to prevent the plastic wrapping foil from slipping off the corners



Pallet Solid, Standard

light grey

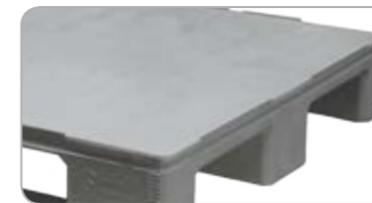


Pallet Solid, Reinforced

BI-COLOUR light grey upper surface, turquoise pastel bottom



Sticker Area

Protected (recessed) areas to place your stickers

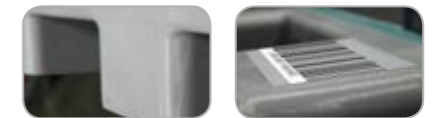

Anti Slip Surface

Anti Slip injected surface - optional



Pallet Perforated, Standard

turquoise pastel



Pallet Perforated, Reinforced

BI-COLOUR turquoise pastel upper surface, light grey bottom



For other colours please check with us